

MICROCOR® ONLINE SYSTEM

MT-9485A


Features

- **High Resolution Corrosion/Erosion Measurement**
- **Online Configuration**
- **Rapid Response**
- **Rated for Hostile Environments**
- **Approved for Hazardous Locations**

The Microcor® corrosion monitoring technology has been developed to substantially increase the speed of response over conventional monitoring techniques, such as coupons, electrical resistance (ER) probes, approaches that of linear polarization resistance (LPR), and is functional in all environments.

Microcor is the result of patented technology which combines the rapid response of LPR and the universal applicability of ER.

The Microcor Transmitter is rated explosion-proof to the latest ATEX, UL and CSA standards, and it communicates

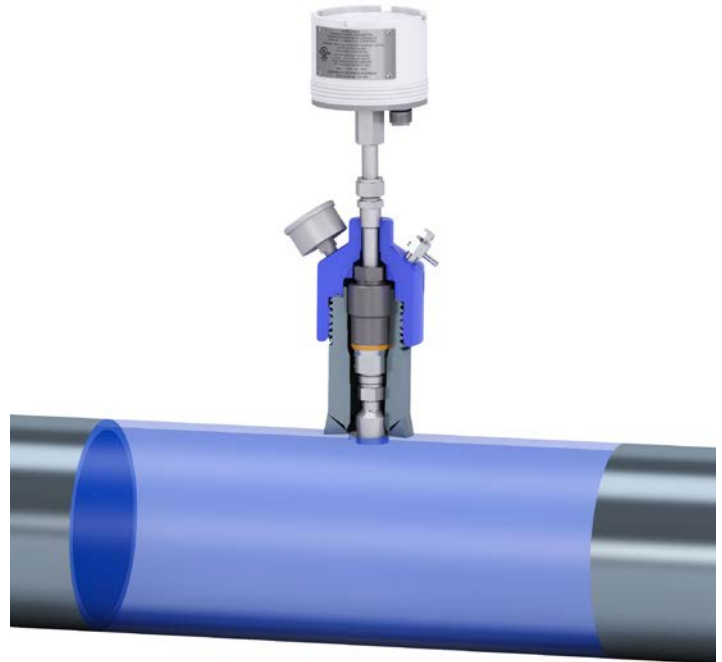

MT-9485A Transmitter connected to M4700 Probe

over an RS 485 Field Bus. This design has the advantage of a more economical field installation cost.

A single cable may be used to connect up to 32 transmitters with a single cable run. This single multi-drop cable contains the 24 VDC supply to power the transmitters and the RS 485 communication bus. This design avoids the need to run a cable to each transmitter which is required with other designs.

For dedicated on-line systems the RS 485 bus is connected from isolating RS 485 cards mounted directly in the monitoring computer. A separate 24 VDC supply is also required to power the Microcor transmitters.

COSASCO®

Specifications

Transmitter Model MT-9485A

- **Resolution:** 18 bit (1 part in 262,144)
- **Probe element resistance range:** 1 to 50 milliohms
- **Power supply:** 10-32 VDC at the transmitter
- **Current consumption:** at 24VDC typical 17 mA
- **Communication:** RS 485 two-wire 2400 Baud, 8 data bits, 1 stop bit, no parity (300 baud when connecting through – RS232/485 converter MA-1000)
- RS 485 addresses 0 to 31
- **Ambient temperature range:** -40C to +70C (-40F to +158F)
- **Enclosure:** NEMA 7 and IP 66/ NEMA 4X
- **Weight:** 3.5 lbs (1.6 Kg)
- **Hazardous area Certifications:**
 - Europe (CE/ATEX/EMC)
 - CE 0539 II 2G
 - DEMKO 03 ATEX 0215219
 - STD EEx d IIC T6
 - T_{amb}= -40C to +70C


USA/Canada



Class I, Zone 1, AEx d IIC T6/EX d IIC T6
 Class I, Div 2, Groups A, B, C, D when installed in accordance with installation drawing 702106
 T_{amb}= -40C to +70C



Microcor Transmitter on an Access Fitting

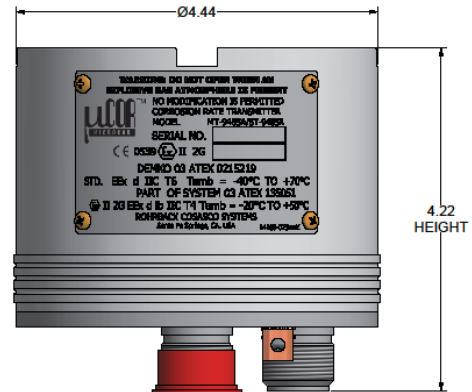

Probe to Transmitter:

- P/N 745092 – Probe Adapter for M2000 and M3000 series Fixed and Retractable Probes
- P/N 745093 – Probe Adapter for M4000 series High Pressure (Cosasco®) Probes
- P/N 745114 – High pressure probe adapter for M4000 high pressure probes. (10,000 PSI max.)
- P/N 748223-6 – Probe to Transmitter Cable Assembly (UL/CSA)
- P/N 748224-6 – Probe to Transmitter Cable Assembly (ATEX)
- P/N 745124 - Microcor Hydraulic High Pressure Probe Adapter 10,000PSI

Cosasco

11841 Smith Avenue
 Santa Fe Springs, CA 90670, USA
 Tel: 1-562-949-0123
 Email: sales@cosasco.com
 Web Site: www.cosasco.com

©Rohrback Cosasco Systems, Inc. All rights reserved

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described wherein or their use or applicability. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

